



**SLD1068 (2000nits)**  
**10.4" TFT LCD, LED Backlight 2000nits,SVGA**

10.4" TFT LCD panel, built-in 2000 nits high bright for sunlight readable LCD display, high transmittance color filter, high transmission polarizing plates, Low Power Consumption, suitable for kiosk, advertising, POS, marine, transportation, gaming, studio display, gas pump.

**Key Features**

- Sunlight Readable
- LED Backlight
- High Shock & Vibration Resistance
- Low Power Consumption
- Wide Operation Temperature
- High Uniformity
- Low EMI Noise
- Wide Dimming
- Life Expectancy



**Specifications**

V1

<b>Model No.</b>	<b>SLD1068</b>
<b>Description</b>	10.4" TFT LCD, LED Backlight 2000 nits, SVGA
<b>Display Area (mm)</b>	210.2 (H) x 158.4(V) mm
<b>Brightness</b>	2000 cd/m <sup>2</sup>
<b>Resolution</b>	800 x 600 (SVGA)
<b>Contrast Ratio</b>	600 : 1
<b>Pixel Pitch (mm)</b>	0.264(H) x 0.264(V)
<b>Viewing Angle</b>	+45°~65°(H), +65°~65°(V)
<b>Display Colors</b>	262K
<b>Response Time (Typical)</b>	25ms (Typical)
<b>Sync</b>	LVDS
<b>Power Consumption</b>	11W
<b>Dimensions (mm)</b>	249.2(W) x 206.2(H) x 45.8(D)mm
<b>Weight (Net)</b>	1.64Kg
<b>LED Driving Board</b>	LID10A
<b>Control Board (Optional)</b>	<input type="checkbox"/> AD6038GD
<input type="checkbox"/> AD6038GD	VGA+DVI
<b>F / R Control Button</b>	<input type="checkbox"/> 4 Key
<input type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-),
<b>OSD Menu</b>	Brightness, Contrast, H/V Position, Color, Phase, Clock...
<b>Optional</b>	<input type="checkbox"/> AOT <input type="checkbox"/> Touch Screen

Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.


**SLD** = Panel+LED Driving Board+Control Board



## Mechanical Drawing

### Outline Dimensions

Unit:mm

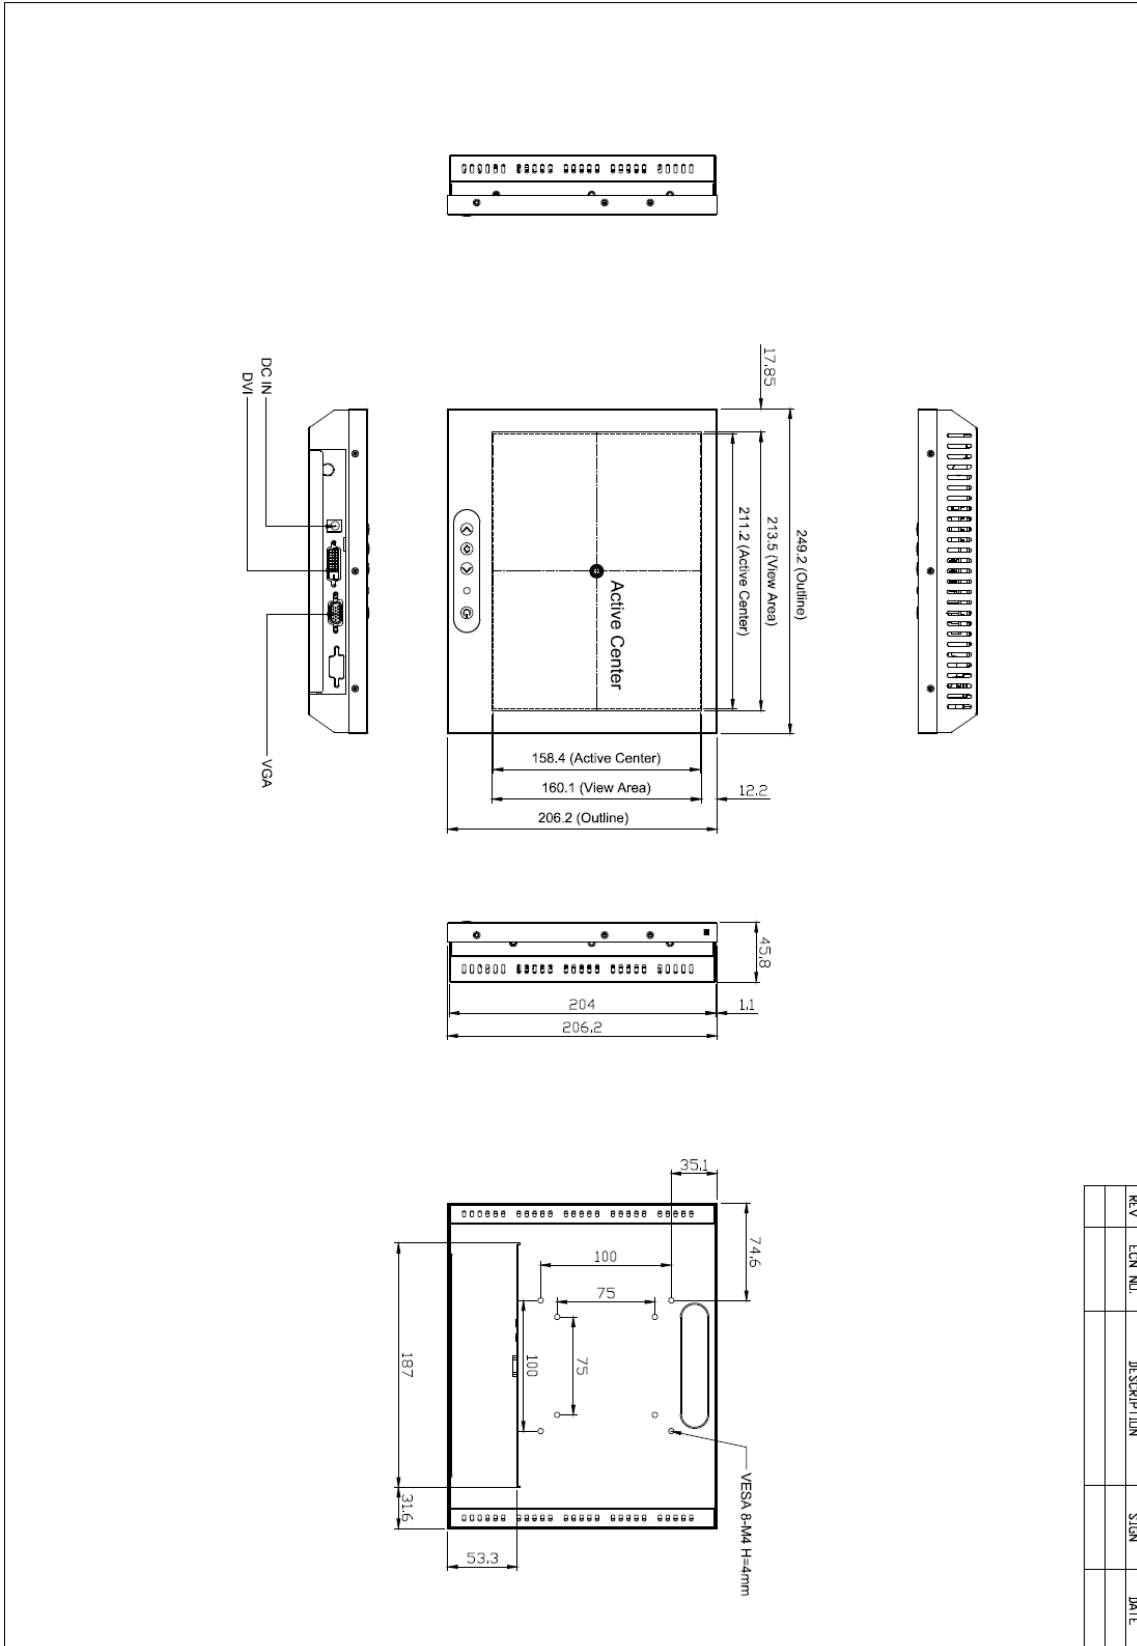



### Ordering Information

Model Name	Description
SLD1068-EGA-I51	10.4",2000nits,SVGA,AR Glass,LID10A.AD6038GD,O/F, V01

### Optional Accessories

Part Number	Description
840612051100	ADAPTER.12V.5A.60W.EA1050A,P
810618301010	CABLE.POWER.AC.1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE.POWER.AC.1830mm UK type
810618301170	CABLE.POWER,AC,1830mm Australia type
810618301030	CABLE.POWER.AC.1830mm Japan type
800901505000	CABLE,OTHER,LED,150mm,28AWG,1.5mm 2P connector to 1.5mm 2P connector, P