




DLF1333-H / DLH1333-H

13.3" Wide Temp TFT LCD, LED Backlight 600nits,XGA

13.3" TFT LCD panel, built-in 600 nits high bright for sunlight readable LCD display, high transmittance color filter, high transmission polarizing plates, Low Power Consumption, suitable for kiosk, advertising, POS, marine, transportation, gaming, studio display, gas pump.

Key Features

- LED Backlight
- High Shock & Vibration Resistance
- Low Power Consumption
- Wide Operation Temperature. (-20°C ~ 70°C)
- High Uniformity
- Low EMI Noise
- Wide Dimming
- Life Expectancy

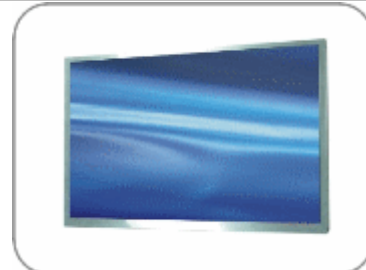

Specifications

V1

Model No.	DLF1333-H	DLH1333-H
Description	13.3" TFT LCD, LED Backlight 600nits,XGA	
Display Area (mm)	270.33 x 202.75mm	
Brightness	600 cd/m ²	
Resolution	1024 x 768 (XGA)	
Contrast Ratio	1200 : 1	
Pixel Pitch (mm)	0.264(H) x 0.264(V)	
Viewing Angle	+80°~-80°(H), +70°~-80°(V)	
Display Colors	262K	
Response Time (Typical)	12ms	
Sync	LVDS	
Power Consumption	7W / 11.4W	
Dimensions (mm)	284 x 215.5 x 6.8	
Weight (Net)	440 g / 800g	
LED Driving Board	LID 13A	
Control Board (Optional)	<input type="checkbox"/> AD6038G <input type="checkbox"/> AD6038GA <input type="checkbox"/> AD6038GD <input type="checkbox"/> AD2662GDHVA	
<input type="checkbox"/> AD6038G	VGA	
<input type="checkbox"/> AD6038GA	VGA+Audio	
<input type="checkbox"/> AD6038GD	VGA+DVI	
<input type="checkbox"/> AD2662GDHVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component /HDMI)	
F / R Control Button	<input type="checkbox"/> 5 Key <input type="checkbox"/> 4 Key	
<input type="checkbox"/> 5 Key	Power Switch, Menu, Select (+,-), Auto	
<input type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-),	
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...	
Optional	<input type="checkbox"/> AOT <input type="checkbox"/> Touch Screen	

Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.

DLF= Panel+LED Driving Board


DLH= Panel+LED Driving Board+Control Board



Mechanical Drawing

Outline Dimensions

Unit:mm

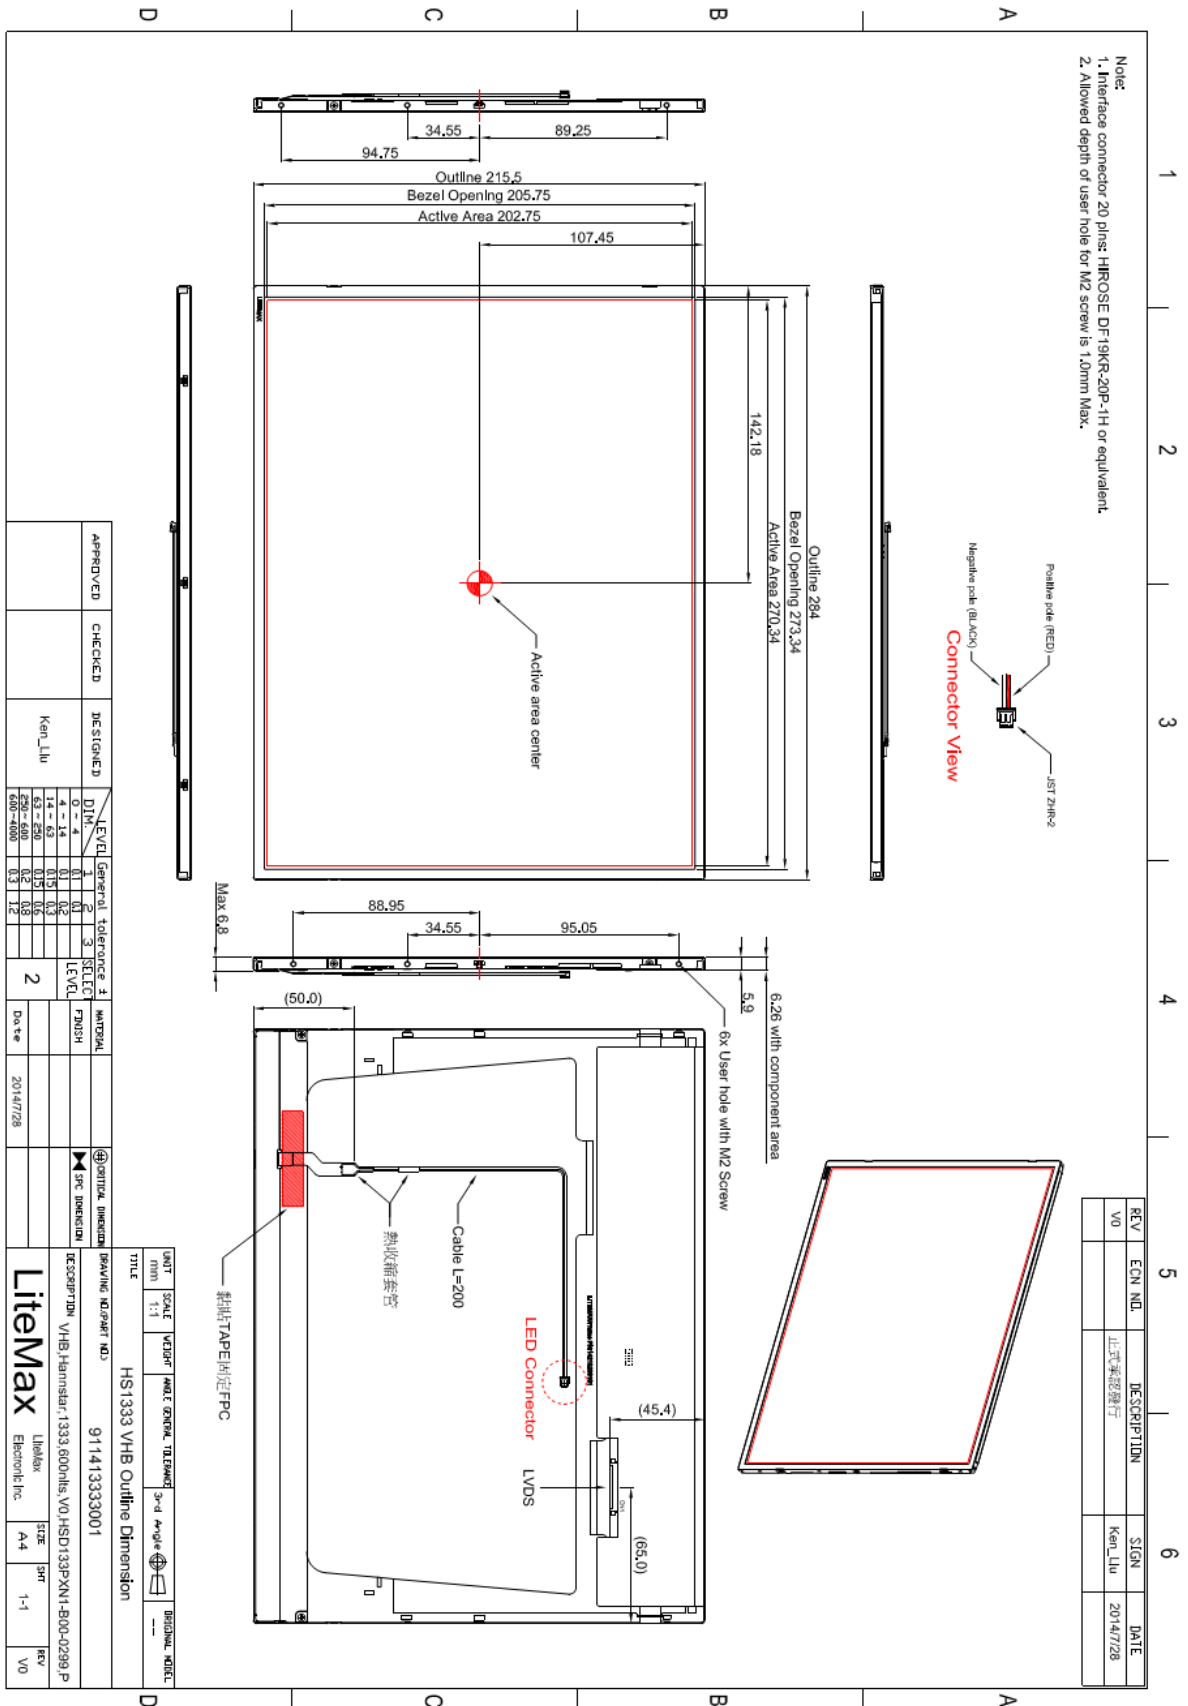

APPROVED	CHECKED	DESIGNED	Ken_Liu
LEVEL		General	tolerance
DIM.		1	3
0 - 4		0.1	0.2
4 - 14		0.15	0.2
14 - 50		0.2	0.2
50 - 600		0.2	0.3
600 - 4000		0.3	0.3
MATERIAL		SPECIFICATION	
FINISH		DATE	
2014/7/28		Date	

REV	ECN NO.	DESCRIPTION	SIGN	DATE
V0		正式承認發行	Ken_Liu	2014/7/28

TITLE	HS1333 VHB Outline Dimension
DESCRIPTION	VHB Hammer, 1333 6000rph, V0, HSD1333XN1-B00-0299 P
DESIGNER	Ken_Liu
DATE	2014/7/28
SCALE	1:1
UNIT	mm
PROJ	1333
DATE	2014/7/28
REV	V0



Ordering Information

Part Number	Description
DLF1333-HNN-A01	13.3",600nits,XGA,LID13A.V01(10 in 1)
DLH1333-HNN-I01	13.3",600nits,XGA,LID13A.AD6038GD,DC 12V,V01(10 in 1)

Optional Accessories

Part Number	Description
840612051100	ADAPTER.12V.5A.60W.EA1050A,P
810618301010	CABLE.POWER.AC.1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE.POWER.AC.1830mm UK type
810618301170	CABLE.POWER,AC,1830mm Australia type
810618301030	CABLE.POWER.AC.1830mm Japan type